

# MORPHOACCESS® **SIGMA** LITE SERIES

SLIM AND POWERFUL FINGERPRINT ACCESS TERMINALS

edded SERVER	09:40 Ø 98 %	
ollm		
Enrollment Mode	Db Only 🗸	
Licor Enrollin	Reset Card	
USER ERFOIL	ient mormation	
User ID	1234	
Fetch User ID fro	om card	
Name	HARPER	
First Name	Alan	-
Live Feedba	ck	
	Capture 2/3, Finger 1/2 Fingerprint quality: 81	



- World's #1 fingerprint technology inside 1:10,000 user identification in 1 second
- High capacity 30,000 templates, 250,000 IDs in authorized user list, 1 Million logs
- Anti-fraud features Fake finger detection, duress finger, timed anti-pass back
- Flexibility

Prox<sup>®</sup>, iClass<sup>®</sup> or MIFARE<sup>®</sup>/DESFire<sup>®</sup>/NFC contactless card reader as an option

• Tough design IP65 rated and vandal resistant (IK08)

## MORPHOACCESS® SIGMA LITE SERIES

S 0

М

S

Е

Ε

Κ

Ν

G

S

Μ

Α

R

### The SIGMA family welcomes new members!

Engineered with the same attention to detail and performance as their predecessor, the MorphoAccess<sup>®</sup> SIGMA Lite terminals are specifically designed to equip narrow mounting surfaces, such as glass/aluminum door mullions, turnstiles, or server rack doors.

With two designs and multiple card reader options, there are a variety of models to address the widest range of deployment scenarios, both indoors and outdoors.

### World's #1 fingerprint technology inside -

- Morpho fingerprint technology ranked #1 by NIST for accuracy
- Up to 10,000 users (30,000 templates) in 1:N identification mode
- 1:10,000 user matching in 1 second
- Accuracy maintained regardless of number of users in database
- FBI PIV IQS certified optical sensor

### Full set of card reader options

- Prox®
- iClass<sup>®</sup>
- MIFARE<sup>®</sup>/MIFARE<sup>®</sup> Plus/DESFire<sup>®</sup>/NFC<sup>(1)</sup>

# A = THE RIGHT COMBINATION

Entra PASS

MA SIGMA Lite With blue/green/red LED indicator and buzzer



<sup>(1)</sup> NFC support depends on the smartphone model used with the MA SIGMA Lite/Lite+ device <sup>(2)</sup> IK08 rating is not available for MA SIGMA Lite+ design

### www.TURNSTILES.us / www.entrapass.com / 8641 S. Warhawk Road, Conifer, CO 80433 / 303-670-1099

MA SIGMA Lite+ With 2.8" QVGA color touchscreen and buzzer

(2.36")

SAFRAN

Ð

Ð

Monday 11:30:41

Morpho


### TECHNICAL SP

Outputs

Tamper switches

- 1 Million transaction logs

- **CPU:** ARM<sup>®</sup> Cortex<sup>™</sup>-A9 core 1GHz
- Linux Operating System
- FBI PIV IQS certified optical fingerprint sensor
- Contactless reader options: Prox<sup>®</sup>, iClass<sup>®</sup>, MIFARE<sup>®</sup>/MIFARE<sup>®</sup> Plus/DESFire<sup>®</sup>/NFC<sup>(1)</sup>
- Network/Communication:
  Ethernet, RS485, USB
- Wi-Fi option
- Power supply:
- 12V-24V DC
- Power over Ethernet (PoE) Compatible with PoE+ switches
- <sup>(3)</sup> Alternate password solution instead of fingerprints
- <sup>(4)</sup> Prevents repeated authorizations by the same user, within a configurable time period

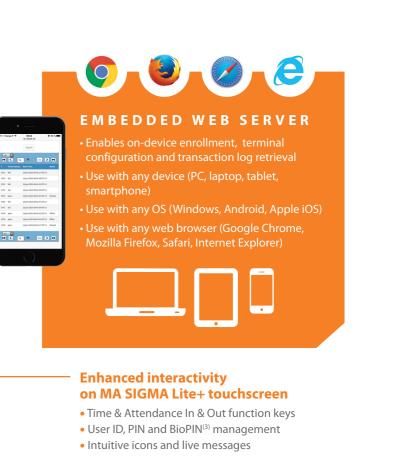

### **Anti-fraud features**

- Fake finger detection
- Duress finger
- Timed anti-pass back function<sup>(4)</sup>
- Banned/authorized user lists

### The SIGMA family



### CIFICATIONS

 Internal storage capacity: 512MB Flash, 512MB RAM
 500 user records, extendable to 3,000 or 10,000 with license (\*3 templates each, including 1 duress)
 250,000 IDs in authorized user list

• Inputs/outputs: Wiegand In & Out (customizable up to 512 bits), Door Relay, 2 General Purpose Inputs (including Door monitoring), 2 General Purpose

### Operating conditions:

- Temperature: -20°C to 55°C (-4°F to 131°F)
- Humidity: 10% to 80% (non condensing)
- Ingress protection: IP65
- Mechanical impact protection: IK08<sup>(2)</sup>
- **HxWxD** = 156\*68\*62 mm (6.14\*2.68\*2.44 inches)
- Weight: 280 grams
- EMC/Safety standards: CE, CB, FCC
- RoHS, REACh and WEEE compliant